


Quick Hitches

(Category II & III)

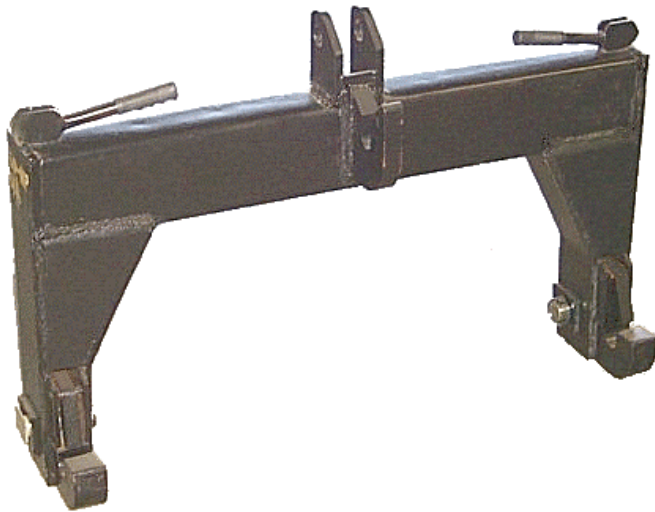

Cat. 2 Quick Hitch

Worksaver Quick Hitches are built for fast, safe, and easy connection (or disconnect) of 3-point implements. It will give you years of trouble-free service in handling your equipment because it is constructed of heavy steel bar and tubing. The Worksaver Quick Hitches fit most Category III 3-point hitch tractors. Completely assembled, ready to mount to your tractor.

Easy, Safe Operation Steps

- ◆ *Back Quick Hitch points to implement mounting pins.*
- ◆ *Raise tractor 3-point hitch until implement draw pins are engaged - if light weight equipment is being used, latch handles may have to be raised to correctly engage implement.*
- ◆ *Implement is connected without a strained back, pinched fingers, or any smashed toes.*
- ◆ *Raised latch handles and reverse procedure to disconnect.*

Quick Hitch Features

1. High strength tubing for torsional strength.
2. Over-center spring-loaded latch mechanism provides positive lock yet easy equipment release.
3. Solid flame-cut parts for long life.
4. beefed-up at known wear points.
5. Non-rotating draw pins and adapter bushings for wear resistance.
6. Tapered top hitch point bracket for easier first time connection.
7. Rubber handle grips on latch handles.
8. Comes completely assembled with hardware.

INFORMATION PROVIDED BY:

Model	Item No.	Description	Lbs.
QH-101	862840	Category I – with adapter (up to 50hp)	76
QH-102	862845	Category II – with adapter (up to 100hp)	134
QH-107HD	862850	Category II HD – with adapter (up to 150hp)	160
QH-103	862855	Category III (up to 225hp)	182
QH-106N	862880	Category III Narrow (up to 225hp)	176
	862500	Cat. I Adapter Bushing Kit	3
	862530	Cat. II Adapter Bushing Kit	2.2





WORKSAVER®


9 WorkSaver Trail - P. O. Box 100 - Litchfield, Illinois 62056-0100
WEB: <http://www.worksaver.com> E-MAIL: sales@worksaver.com

Quick Hitches (Category I)

WorkSaver's QH-101 category 1 quick hitch is adjustable. No tools required.

Pull pin width – Clearance for 26" spacing
Top Link Hook Height – 14.68" to 17.94"

The QH-101 adjustable quick hitch is ruggedly built and rated for tractors up to 50 hp.

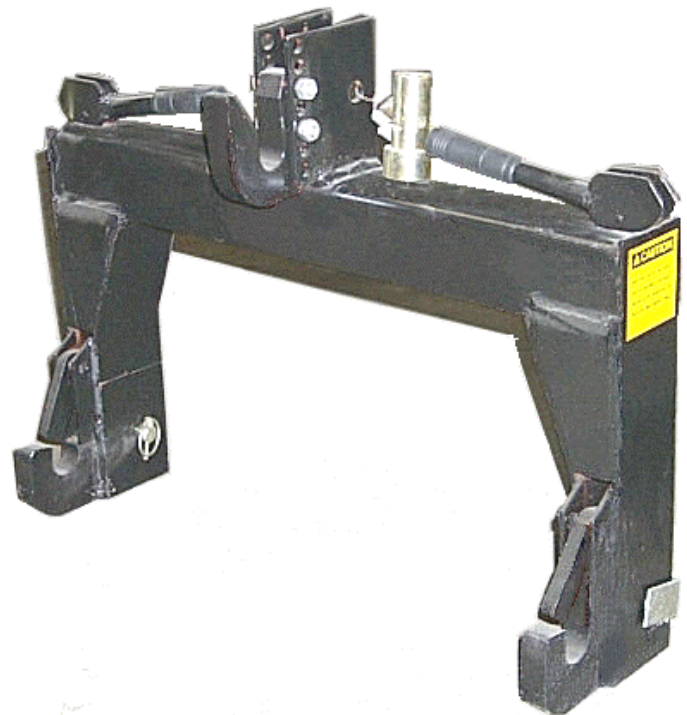

QH-101 Cat. 1 Quick Hitch

Some category 1 equipment has not been built to the exact category 1 ASAE 3-point hitch standard specifications. The top link pin location is too low or high. The QH-101 adjustable quick hitch takes care of most of these problems.

Some 3-point equipment will not accept a top link hook as pictured on the QH-101 quick hitch. The QH-101 provides a special floating top link bracket that allows you to still use the quick hitch to pick up the implement. The floating top link bracket requires manual insertion of pins.

Because Category 1 pins are relatively small and troublesome, expensive to replace, the QH-101 quick hitch is designed to use replaceable wear bushings. One set is included with each quick hitch. Additional bushings may be purchased for other pieces of equipment.

Quick hitches are built for the fast, safe, and easy connection (or disconnection) of 3-point implements. It will give you years of trouble-free service in handling your equipment because it is constructed of heavy steel bar and tubing. The QH-101 quick hitch fits most Cat. I 3-point hitch tractors. Completely assembled, ready to mount on your tractor.